




1. Overview

Handset

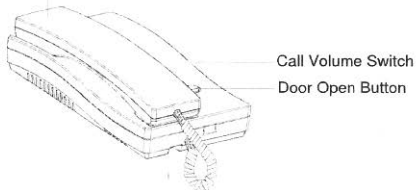

2. Operation

[SUB UNIT]


1. Electric chime call.
2. Back call tone for visitor.
3. Hands free talk within 30cm.

[MASTER UNIT]

1. Lift up handset and talk when a call's coming.
2. Control a call sound with volume control.
3. Door release button able to open the door.




3. Installation

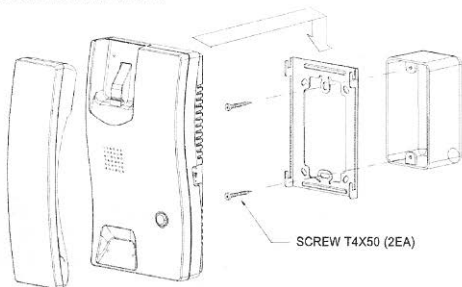



4. Wiring

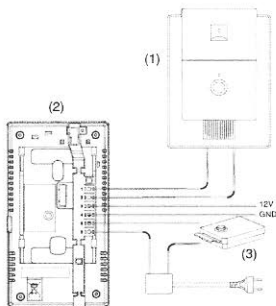

1. Non polarity wiring with Sub Unit(1) and Master Unit (2).
2. Door Release(3) should be provided with additional power source.



5. Specification

Model	DP-2SD
Power Source	DC 12V / 1A
Consumption Power	4.5W(MAX)
Distance	100m(\varnothing 0.65mm), 150m(\varnothing 0.8mm)
Wiring	Call : 2-wire, Door Release : 2-wire(\varnothing 1.6mm Copper wire)
Dimension(mm)	108(W) $^{\circ}$ X210(H) $^{\circ}$ X61.4(D)mm
Weight(g)	640g