


6. RESPONSE TIME

Adjust response time as follows. The unit does not detect the passing object faster than the response time set. If the response time is set longer, the unit does not detect human beings. Adjust to a little longer response time in a site where large passing objects, newspaper or carton box may move.

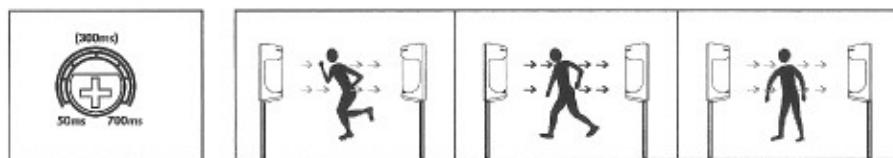

7. TROUBLESHOOTING

Trouble	Possible Origin(s)	Remedy(s)
Transmitter LED does not light.	Incorrectly wired and/or insufficient voltage	Ensure the power supply to the transmitter is 10 to 30 VDC.
Receiver LED never lights up when the beam is interrupted.	a. Insufficient voltage b. Beam reflected away from receiver c. Beams not simultaneously interrupted.	a. Double-check the voltage. b. Clean the cover. c. Check overall installation.
Beams interrupted and LED lights, but no alarm trigger.	Alarm trigger cable may be cut, or the relay contact stuck due to overloading.	Check the continuity of the wiring between the sensor and the alarm.
Alarm LED continuously lit.	a. Lenses out of alignment. b. Beam are blocked. c. Cover is foggy or dirty.	a. Realign the lenses. b. Remove any obstacles. c. Clean the cover.
Alarm trigger becomes erratic in bad weather.	Lenses out of alignment.	Check overall system installation. If still erratic, realign the lenses.
Frequent false triggers from leaves, bird, etc.	a. Too sensitive. b. Bad location.	a. Reduce the response time. b. Change the transmitter and/or location.

8. SPECIFICATIONS


Model	PB-10HD	PB-25HD	PB-30HD	PB-40HD	PB-60HD	PB-120HD
Max. range(outdoor)	33ft(10m)	83ft(25m)	100ft(30m)	206ft(60m)	264ft(80m)	400ft(120m)
Max. range(indoor)	6ft(2m)	16ft(5m)	20ft(6m)	40ft(12m)	52ft(16m)	80ft(24m)
Current	6mA	8mA	8.5mA	8.5mA	73mA	77mA
Power	10~30VDC(Non-polarity)					
Detection system	50~700usec(variable)					
Alarm output	Contact capacity(NC/NO, 1A/120VAC)					
Tamper output (Tx & Rx)	NC switch, 1A@120VAC					
Alarm LED (Receiver)	Red LED -ON When transmitter and receiver are not aligned or when beam is broken.					
Signal LED (Receiver)	Yellow LED -ON When receiver's signal is weak or when beam is broken.					
Power LED (Transmitter and Receiver)	Green LED -ON Indicates connected to power.					
Laser wavelength	650nm					
Laser output power	≤5mW					
Alignment angle	Horizontal:±90°, Vertical:±15°					
Operating temperature	-23°F(-25°C)to +131°F(+55°C)					
Weight	2.5lbs(1.1kg)					
Case	PC Resin					
Humidity	<70%					

** No laser beam alignment: PB-10HD/PB-25HD

** With laser beam alignment: PB-30HD/PB-60HD/PB-80HD/PB-120HD

Twin Photoelectric Beam Sensors

PB-10HD/25HD/30HD/60HD/80HD/120HD



Features:

Range —

PB-10HD : Outdoor 33ft.(10m), Indoor 66ft.(20m) (No laser)

PB-25HD : Outdoor 83ft.(25m), Indoor 166ft.(50m) (No laser)

PB-30HD : Outdoor 100ft.(30m), Indoor 200ft.(60m) (With laser)

PB-60HD : Outdoor 200ft.(60m), Indoor 400ft.(120m) (With laser)

PB-80HD : Outdoor 260ft.(80m), Indoor 520ft.(160m) (With laser)

PB-120HD : Outdoor 400ft.(120m), Indoor 800ft.(240m) (With laser)


- Twin beam provide reliable perimeter security minimizing false alarms from falling leaves,birds,etc.
- Lensed optics reinforce beam strength and provide excellent immunity to false alarms due to rain,snow,mist,etc.
- Weatherproof,sunlight-filtering case for indoor and outdoor use.
- Anti-frost system so that beam functions even in extreme conditions.
- Automatic input power filtering with special noise rejection circuitry.
- N.C/N.O. Alarm output.
- N.C. Tamper circuit included.
- Non-polarized power inputs.
- Quick,easy installation with built-in laser beam alignment system.

1. PARTS DESCRIPTION


[COVER]



[RECEIVER]



9. EXTERNAL DIMENSIONS

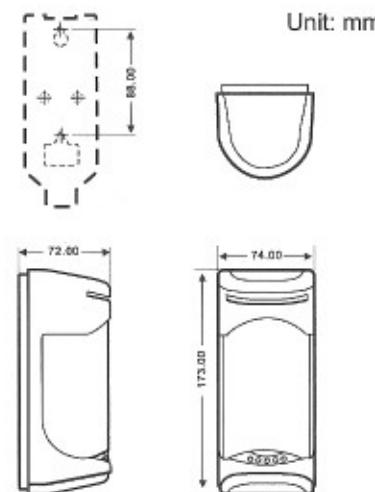

2. CAUTIONS ON INSTALLATION

Do Not




◆ Remove all obstructions (trees,clothes,lines,etc.) between Transmitter/Receiver.



◆ Avoid strong light from the sun, automobile headlights etc.directly shining on Transmitter/Receiver. When strong light stays optical axis for a long time, it does not cause malfunction but will affect the product life.





◆ Do not install the unit on places where it may be splashed by dirty water or direct sea spray.

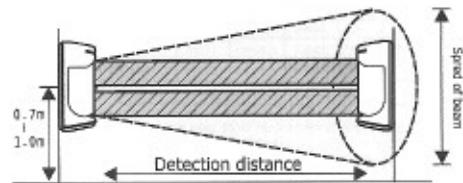


Position of installation

The photoelectric beam lens can be adjusted horizontally $\pm 90^\circ$, and vertically $\pm 15^\circ$. This allows much flexibility in terms of how the transmitter and receiver can be mounted. Install at a distance of 32" to 39"(80 to 100cm) above the ground for most situations.

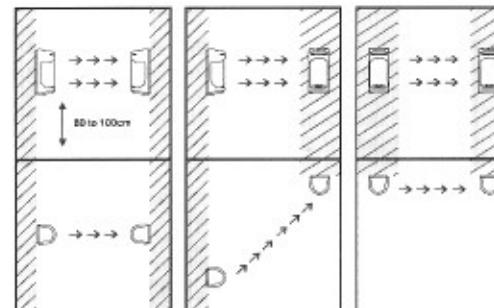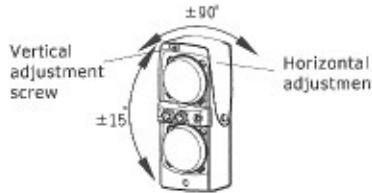

3.WIRING

Wiring

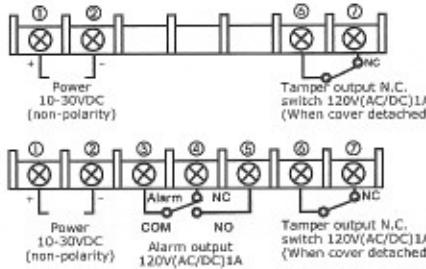

Running the Cable

Run a cable from the alarm control panel to the photocell sensor. If burying the cable is required, make sure to use electrical conduit. Shielded cable is strongly suggested. See table 1 for maximum cable length.

Table1:Cable Length

Model No.	PB-10HD	PB-25HD	PB-30HD
Wire/Volt.	12V	24V	12V
Wire/Volt.	12V	24V	12V
AWG22	360m	3,200m	220m
AWG20	600m	5,400m	550m
AWG18	1,000m	8,640m	800m
AWG16	1,200m	12,000m	980m
Model No.	PB-20HD	PB-25HD	PB-30HD
Wire/Volt.	12V	24V	12V
Wire/Volt.	12V	24V	12V
AWG22	280m	2,400m	200m
AWG20	450m	4,200m	350m
AWG18	700m	6,200m	580m
AWG16	850m	7,600m	590m

Note(1):Max.cable length when two or more sets are connected is the value show in Table 1 divided by the number of sets.


Note(2):The power line be wired to a distance of up to 3,300 ft.(1,000m) with AWG22(0.33mm²)telephone wire.

4.INSTALLATION METHOD

Wall Mount

- (1)Loosen the cover locking screw and remove the cover. Loosen the unit setting screw at lower part of unit base. Slide the mounting plate downwards and remove it.
- (2)Pull wire through on the installation site.
- (3)Break grommet on mounting plate and pull wire through it. Secure the plate with 4mm screws.

Note:Plug opening between grommet and wire with sealing materials.

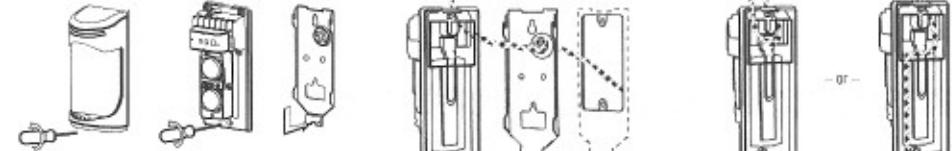


Pull wire through sensor body(back to front) and attach it to the mounting plate.

- (5)After wiring is completed,adjust alignment ,check operation and attach cover.

Pole Mount


- (1)Use dia 38mm to 45mm pole.
- (2)Insert 2 pcs.of oval countersunk head screws(M4x20)in a pole bracket with a few rotation.
- (3)Fix pole mounting plate to pole with pole bracket.
- (4)Detach cover, and remove mounting plate from sensor body.
- (5)Temporarily insert 2 pcs of M4x10 screws in pole mounting plate and fix sensor,mounting plate on them.
- (6)Do the same procedure as (3)-(5)of wall mount.

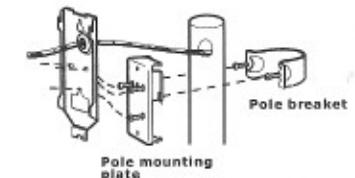

5.ALIGNMENT AND OPERATION

Eyeball adjustment

- (1)Remove the transmitter cover, and look into one of the alignment viewfinders (one of the four holes located between to two lenses)at a 45 angle.
 - (2)Adjust the horizontal angle of the lens vertically and horizontally until the receiver is clearly seen in the viewfinder.
 - (3)Repeat steps 1 and 2 for the receiver.
 - (4)Replace the transmitter and receiver covers.
- NOTE:If you cannot see the opposite unit in the viewfinder,put a sheet of white paper near the unit to be seen,

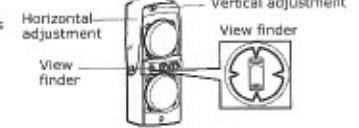

Laser adjustment

- (1)Remove the transmitter cover, then turn the laser on with the ON/OFF switch.
 - (2)Adjust the transmitter's sensor unit vertically and horizontally until the red dot is centered on the receiver and both the receiver's LEDs turn off.
 - (3)Repeat steps 1 and 2 for the receiver.
 - (4)Turn the lasers off, and then replace the covers.
- WARNING:Do not look directly at the lasers.



Alarm and signal LEDs	Signal strength
Two LEDs OFF	Best
One LED ON	Good
Two LEDs ON	Re-adjust

Fine Tuning the Receiver

- (1)Once the sensor is mounted and aligned, the sensor can be fine tuned using the voltage output jack.
- (2)Set the range of a volt-ohm meter(VOM)to 0~10VDC.
- (3)Measure the voltage.
- (4)Adjust the horizontal angle by hand until the VOM indicates the highest voltage.
- (5)Adjust the vertical angle by turning the vertical adjustment screw until the VOM indicates the highest voltage.

Voltage output	Alignment quality
3.4~5V	Best
1.15~3.4V	Good
1.0~1.15V	Fair
<1.0V	Re-adjust

